



Shanghai Lunsure Electronic
Technology Co.,LTD
Tel:0086-21-37185008
Fax:0086-21-57152769

AR251/ARS251
THRU
AR256/ARS256

BUTTON DIODES


VOLTAGE RANGE
100 TO 600 VOLTS
CURRENT 25AMPS

Features

- Low leakage
- Low forward voltage drop
- High current capability
- High forward surge current capability

Mechanical Data

- Case: transfer molded plastic
- Technology: vacuum soldered
- Polarity: color ring denotes cathode
- Lead: Plated lead, solderable per MIL-STD-202E method 20
- Mounting position: Any
- Weight: AR 1.80 grams, ARS 1.60 grams

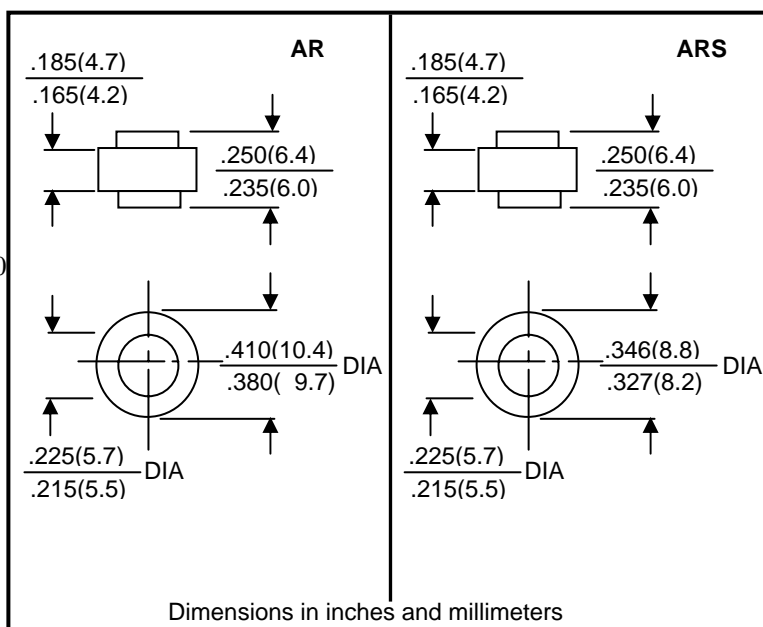

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified
Single phase, half wave, 60Hz, resistive or inductive load
For capacitive load derate current by 20%

| Parameters | Symbols | AR251 ARS251 | AR252 ARS252 | AR253 ARS253 | AR254 ARS254 | AR256 ARS256 | Units |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 100 | 200 | 300 | 400 | 600 | Volts |
| Maximum RMS voltage | V_{RMS} | 70 | 140 | 210 | 280 | 420 | Volts |
| Maximum DC blocking voltage | V_{DC} | 100 | 200 | 300 | 400 | 600 | Volts |
| Maximum Average rectified forward current at $T_C=110^\circ C$ | I_o | 25 | | | | | Amps |
| Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (JE DEC Method) | I_{FSM} | 400 | | | | | Amps |
| Rating for fusing($t<8.3ms$) | I^2t | 664 | | | | | A^2S |
| Maximum instantaneous forward voltage drop at 100A | V_F | 1.1 | | | | | Volts |
| Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=150^\circ C$ | I_R | 5.0 450 | | | | | μA |
| Typical thermal resistance | $R_{\theta JC}$ | 1.0 | | | | | $^\circ C/W$ |
| Operating and storage temperature | T_J, T_{STG} | -65 to +175 | | | | | $^\circ C$ |

Notes: 1.Enough heatsink must be considered in application.

AR251 THRU AR256 ARS251 THRU ARS256

Ratings and Characteristic Curves

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

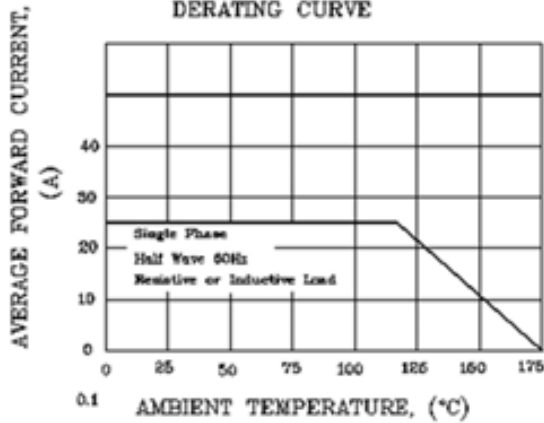


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

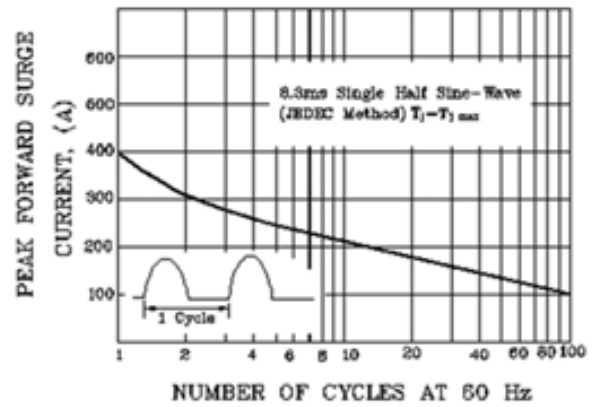


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

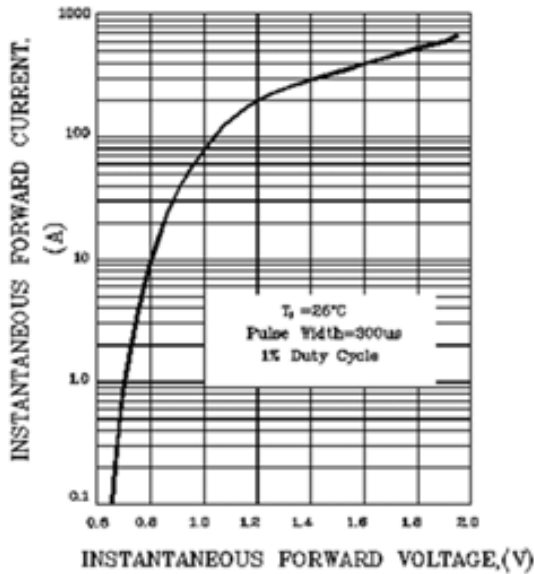


FIG.4- FORWARD POWER DISSIPATION

