



Shanghai Lunsure Electronic
Technology Co.,Ltd
Tel:0086-21-37185008
Fax:0086-21-57152769

KBP2005 THRU KBP210

Features

- Glass Passivated Die Construction
- Low Forward Voltage Drop
- Ideal for Printed Circuit Boards
- High Surge Current Capability

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

| Part Number | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|-------------|--|---------------------|-----------------------------|
| KBP2005 | 50V | 35V | 50V |
| KBP201 | 100V | 70V | 100V |
| KBP202 | 200V | 140V | 200V |
| KBP204 | 400V | 280V | 400V |
| KBP206 | 600V | 420V | 600V |
| KBP208 | 800V | 560V | 800V |
| KBP210 | 1000V | 700V | 1000V |


Electrical Characteristics @ 25°C Unless Otherwise Specified

| | | | |
|---|-------------|---------------------------|--|
| Average Forward Current | $I_{F(AV)}$ | 2.0A | $T_a = 50^\circ\text{C}$ Note1 |
| Peak Forward Surge Current | I_{FSM} | 50A | 8.3ms, half sine |
| Maximum Forward Voltage Drop Per Element | V_F | 1.1V | $I_F = 1.5\text{A}$ per element; $T_J = 25^\circ\text{C}$ |
| Maximum DC Reverse Current At Rated DC Blocking Voltage | I_R | 10 μA 0.5mA | $T_a = 25^\circ\text{C}$ $T_a = 100^\circ\text{C}$ |
| Typical Junction Capacitance per element | C_j | 15PF | Measured at 1MHZ, VR=4V(DC) |
| Typical Thermal Resistance | Rthja | 28 K/W | Note2 |

- Note: 1. Leads maintained at ambient temp. at a distance of 9.5mm from the case
2. Mounted on PC board with 12mm² copper pad

2.0 Amp Glass Passivated Bridge Rectifier 50 to 1000 Volts

KBP

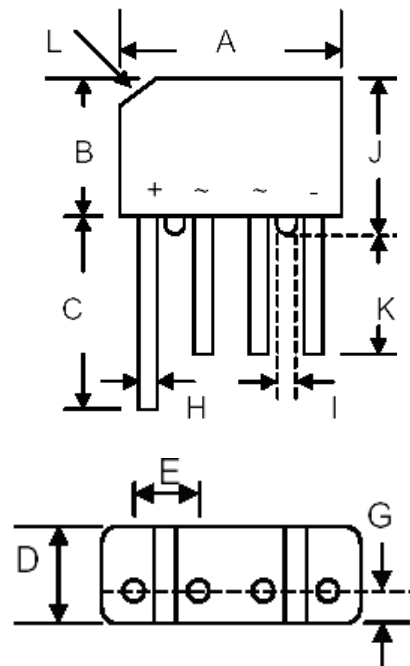

| DIM | DIMENSIONS | | | |
|-----|--------------|------|--------------|-------|
| | INCHES | | MM | |
| | MIN | MAX | MIN | MAX |
| A | .559 | .60 | 14.22 | 15.24 |
| B | .42 | .46 | 10.67 | 11.68 |
| C | .60 | --- | 15.2 | --- |
| D | .168 | .20 | 4.30 | 5.08 |
| E | .142 | .161 | 3.60 | 4.10 |
| G | .085 | .105 | 2.16 | 2.67 |
| H | .03 | .034 | 0.76 | 0.86 |
| I | .06 | --- | 1.52 | --- |
| J | .46 | .50 | 11.68 | 12.70 |
| K | .50 | --- | 12.7 | --- |
| L | 3.2*45° Typ. | | 3.2*45° Typ. | |

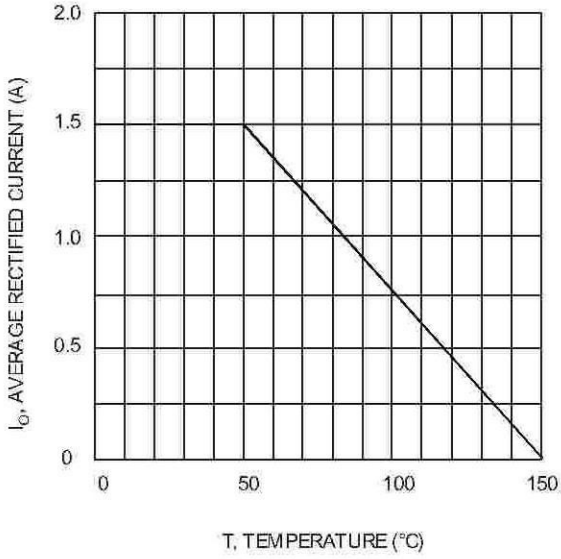


Fig. 1 Forward Current Derating Curve

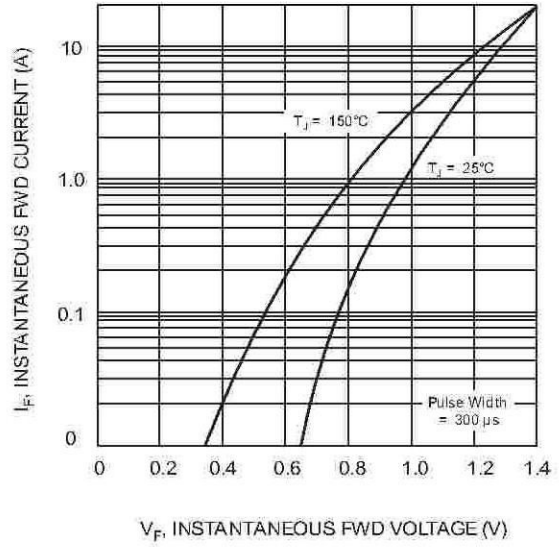


Fig. 2 Typical Fwd Characteristics

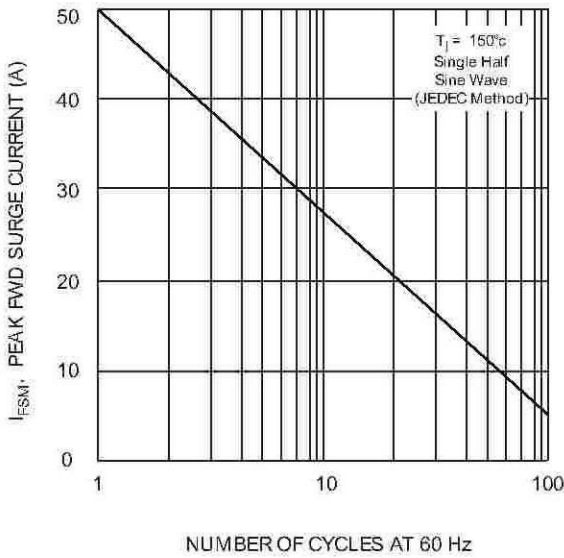


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

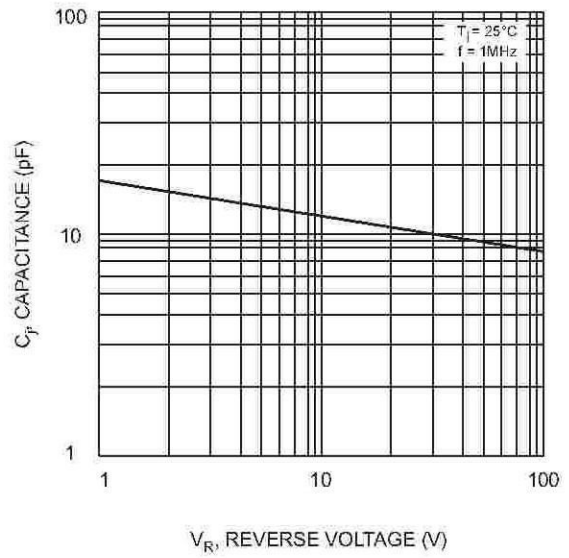


Fig. 4 Typical Junction Capacitance

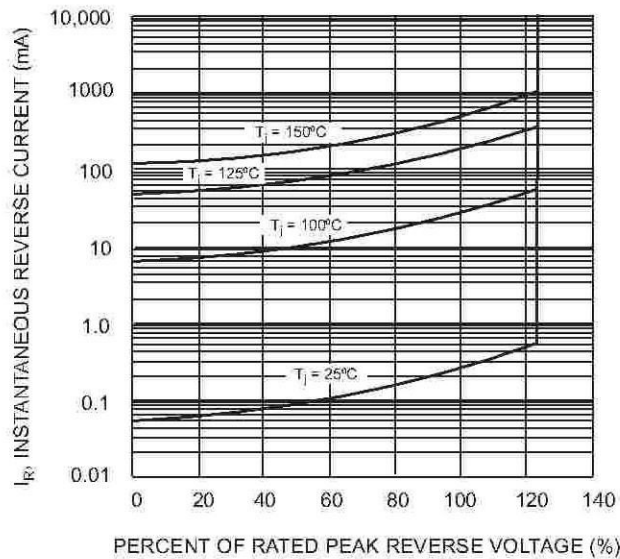


Fig. 5 Typical Reverse Characteristics